




Pro-Jet Fan 30L Series

Features

- Low Noise by a Long Inlet and Outlet Silencer
- Compact Design to Easily Install in Parking Area or Building
- Light Weight by Using Aluminum in Stator and Nozzle

PFS-30L, PFH-30L, PFV-30L

Dimensions




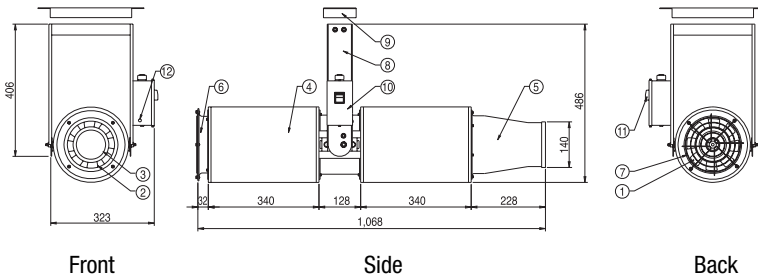


Material Table

- | | |
|--------------|---------------------|
| ① Impeller | ⑦ Screen |
| ② Fan Case | ⑧ Side Bracket |
| ③ Motor | ⑨ Anchor Bracket |
| ④ Silencer | ⑩ Terminal Box |
| ⑤ Nozzle | ⑪ Circuit Protector |
| ⑥ Bell Mouth | ⑫ Operation Lamp |

Air Distributions

Performance Curves

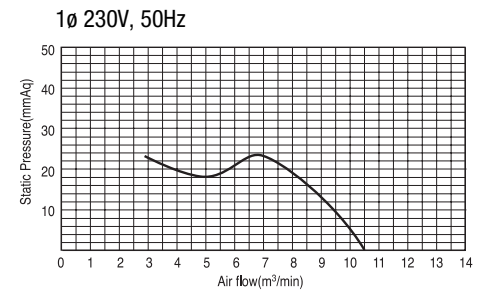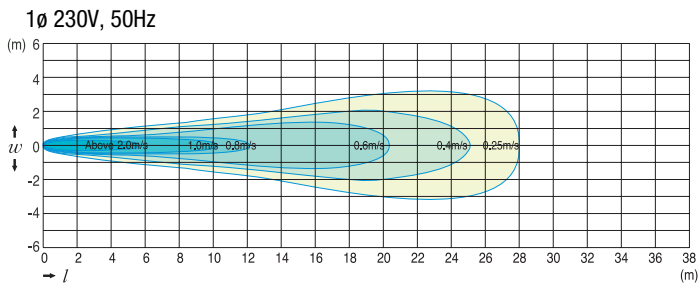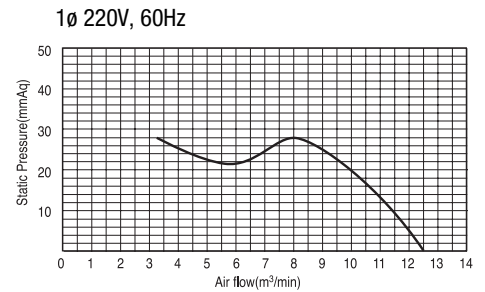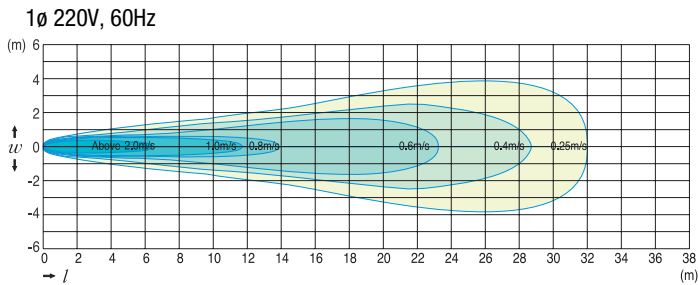

Specifications

Model Name		PFS-30L (Constant Air Flow)		PFH-30L (High Temperature, 250°C, 2hrs)		PFV-30L (Variable Air Flow)	
		1 ϕ 220V, 60Hz	1 ϕ 230V, 50Hz	1 ϕ 220V, 60Hz	1 ϕ 230V, 50Hz	1 ϕ 220V, 60Hz	1 ϕ 230V, 50Hz
Rated Power	V, Hz	1 ϕ 220V, 60Hz	1 ϕ 230V, 50Hz	1 ϕ 220V, 60Hz	1 ϕ 230V, 50Hz	1 ϕ 220V, 60Hz	1 ϕ 230V, 50Hz
Air Flow Rate	CMM	12.5	10.5	12.5	10.5	8.3~18.1	
Outlet Velocity	m/s	13.5	11.4	13.5	11.4	9.0~19.6	
Maximum Throw	m	32	28	32	28	38	
Power Consumption	W	170	150	170	150	380	
Fan Output	W	120	90	120	90	290	
Sound Level	dB(A)	53.2	52.3	53.2	52.3	57.5	
Rotation Speed	rpm	3,450	2,900	3,450	2,900	2,300~5,000	
Weight	kg	16.5	16.5	16.5	16.5	17.2	